



Over 100 Years of Experience

UltiMate LocFast

Wood UltiMate Features:


- Carbon Steel Shank
- Mechanical Zinc Plated
- DEKS Mutli-Seal Washers® washers
- 5/16" Zinc Cast Hex Head

Installation Recommendations:

Recommended Driving Tools: 2,000 - 2,500 RPM electric screw gun with depth sensing nose piece to prevent overdriving and stripout


Seating Torque: For optimum screw and washer performance, seating torque of 30 - 60 in./lbs. is suggested. For premium Ultimate fasteners with DEKS Multi-Seal washers, 15-25 in./lbs is suggested.

- Diameter: #10
- Threads per In.: 14
- Length: 1", 1½", 2
- Head: 5/16" Cast Zinc
- Point: Sharp 26°
- Material: Carbon Steel
- Finish: Mechanical Zinc

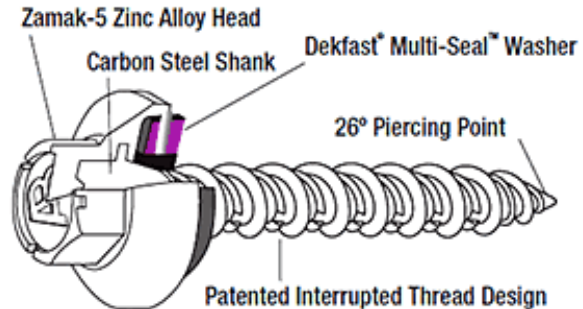

Four Sealing Points

Unique design gives a perfect seal

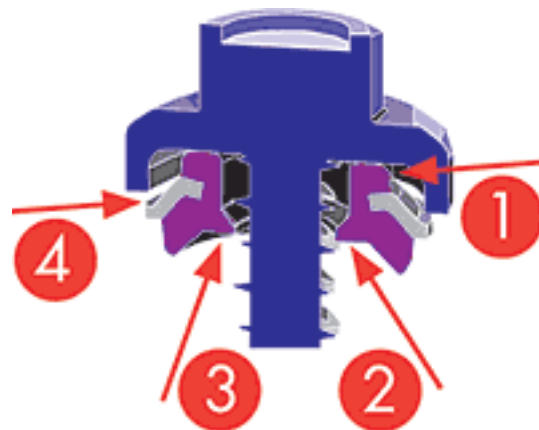

1. Protects and seals under the head
2. Against the shank
3. Against the roof sheet
4. Around the perimeter



www.atlasfasteners.com

1628 Troy Road • Ashland Ohio, 44805
T: 419-289-6171 • F: 419-289-2564

800-321-6977

SALES AND SERVICE CENTERS

Ashland, Ohio
1-800-321-6977


Flat Rock, NC
1-800-364-0370

Houston, TX
1-800-503-2105

Salem, OR
1-800-547-8740



Over 100 Years of Experience

| LocFast | Size | Point | Carton Qty. |
|---|-----------------|---------------|-------------|
| Ultimate LocFast High & Low Thread; Anti-Backout Thread | | | |
|  | #10-14 x 1" | Self-Piercing | 2,500 |
| | #10-14 x 1-1/2" | Self-Piercing | 2,000 |
| | #10-14 x 2" | Self-Piercing | 1,500 |
| | #10-14 x 2-1/2" | Self-Piercing | 1,500 |
| | #10-14 x 3" | Self-Piercing | 1,000 |

ENGINEERING TEST REPORT

| Fastener Diameter | Minimum Torsional | Minimum Tensile | Minimum Shear |
|-------------------|-------------------|-----------------|---------------|
| #10 | 68 in. lbs. | 1817 lbs. | 1216 lbs. |

Test Results - in 2 x 4 Pine (1" Penetration)

| | Pull Out | Back Out Resistance | Installation Speed (Revolutions per Inch) |
|-----------------------|----------|---------------------|---|
| #10 -14 Ultimate Wood | 796 lbs. | 31 in. lbs. | 6.25 |



www.atlasfasteners.com

1628 Troy Road • Ashland Ohio, 44805
T: 419-289-6171 • F: 419-289-2564

800-321-6977

SALES AND SERVICE CENTERS

Ashland, Ohio
1-800-321-6977

Flat Rock, NC
1-800-364-0370

Houston, TX
1-800-503-2105

Salem, OR
1-800-547-8740