



DRILL POINT CAPABILITIES

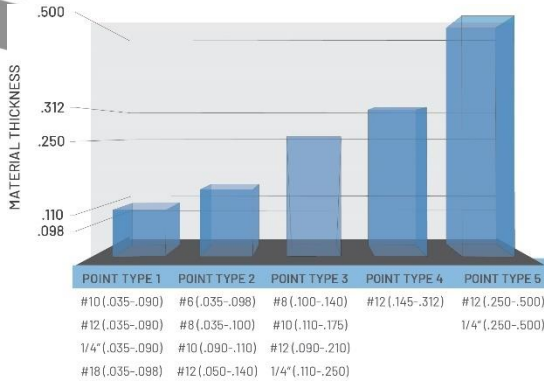

Stitch / Lap Point


5/16 Hex Undercut Head



1/4" LAP	MINI	2,500
1/4-14 x 1"	TCP1	2,000
#18-9 x 1"	TCP1	2,000

Long Pilot Point

5/16 Hex Undercut Head

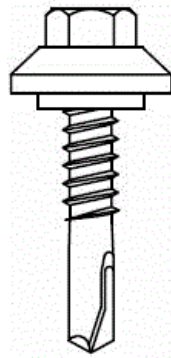

#12-14 x 1"	TCP 2	2,500
#12-14 x 1-1/4"	TCP2	2,000
#12-14 x 1-1/2"	TCP2	1,500
#12 (1/4-14) x 1-7/8 (Insul-Dril®)	TCP2	1,500
#12-14 x 2"	TCP2	1,500
1/4-14 x 1-1/4"	TCP2	1,500
1/4-14 x 1-1/2"	TCP2	1,500

#5 Point

5/16 Hex Undercut Head

#12-24 x 1-1/4"	TCP5	2,000
-----------------	------	-------

RECOMMENDED DRIVING SPEEDS:

Drilling fasteners:

#6 - #10 use an electric screw gun with depth sensing nose piece at 2,500 RPM max.

#12 - #18 use an electric screw gun with depth sensing nose piece at 2,000 RPM max.