

ACCESSORIES

VERSAVENT®

Applied to the Ridge Cap at the Jobsite



AVAILABLE SIZES

Up to 1" rib height and 1-1/4" rib height - two SKUs conform to most roof profiles

ADVANTAGES

Maximizes net-free area

Tear and flame resistant

Won't scratch roof panels

Prevents insect, animal, and snow infiltration


Meets all building codes

99% recovery after compression

EASY INSTALLATION

- ≡ On-site ground level application for no fall risk
- ≡ No additional roof measurements, chalk lines, sealants, or clips required for installation
- ≡ Screws go through ridge cap and VersaVent®

One person dust free installation

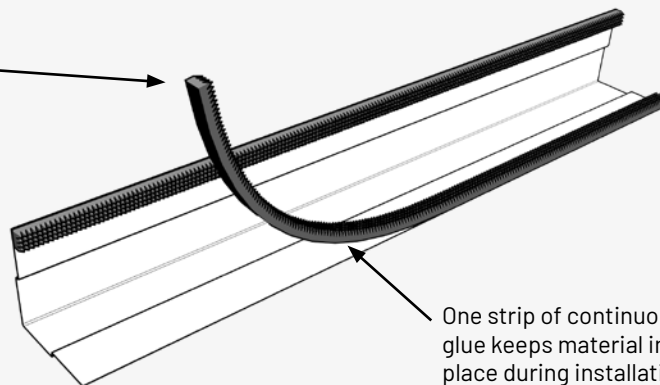

One strip of continuous glue keeps material in place during installation



Scan here for more product information and to view our entire catalog!

ASHLAND, OH

1628 TROY RD
ASHLAND, OH 44805
(800) 321-6977

FLAT ROCK, NC

161 COMMERCIAL BLVD
FLAT ROCK, NC 28731
(828) 692-2603

HOUSTON, TX

4822 N. SAM HOUSTON PKWY W., STE 100
HOUSTON, TX 77086
(800) 503-2105